



GS GLOBAL
SECURITY



PRODUCT CATALOG

2021

- 02 UNV NVR
- 05 Package Kits
- 07 Fixed Dome / Turret
- 09 Mini-Bullet
- 10 Varifocal Dome / Turret
- 11 PTZ Cameras
- 14 Thermal Solutions
- 16 Prime NVR
- 18 Prime IP Cameras

- 24 HD-TVI DVR
- 26 HD-TVI Cameras
- 28 Switches
- 30 Accessories
- 33 Matrix Access Control
- 36 Access Points

Scan to Download PDF



GS Global Security reserves the right to modify, add or remove sales items. Price and product specifications may change without prior notice. GS is not responsible for typographical errors. Images may be used for illustration purposes only and do not represent actual products.

4KNVR

Network Video Recorder System



WIDE VOLTAGE RANGE:
Enhanced reliability of system running



P2P CLOUD SERVICE:
Easy setup via scanning QR code



ANR:
Enhance storage reliability by installing an SD card in the camera



PLUG & PLAY:
Save time during camera installation



CLOUD UPGRADE OPTION:
One-click to upgrade to latest firmware



ONVIF INTERFACE:
Ensure compatibility with a wide range of third-party cameras



ULTRA H.265:
Save on bandwidth and storage space

| Model | EASY SERIES | |
|-------------------|---|---|
| | NVR301-04LS2-P4 | NVR301-08LS2-P8 |
| Video Compression | Ultra 265/H.265/H.26 | Ultra 265/H.265/H.26 |
| Video Resolution | 6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| IP Video Input | 4 CH | 8 CH |
| Bandwidth In/Out | 40mbps / 40mbps | 50mbps / 40mbps |
| Display | HDMI / VGA up to 1080p | HDMI / VGA up to 1080p |
| Playback | 4 CH | 8 CH |
| Audio In/Out | - | - |
| Alarm In/Out | - | - |
| Ethernet | 1x RJ45 10M/100M | 1x RJ45 10M/100M |
| PoE Ports | 4 Ports (802.3af/at) | 8 Ports (802.3af/at) |
| USB | Rear panel: 2 x USB2.0 | Rear panel: 2 x USB2.0 |
| Storage / RAID | 1x SATA up to 8TB/ea | 1x SATA up to 8TB/ea |
| Power | 48V DC | 48V DC |

| Model | 4K NVR SERIES | | | |
|-------------------|---|---|--|--|
| | NVR301-04X-P4 | NVR301-08X-P8 | NVR302-08S2-P8 | NVR302-16S2-P16 |
| | | | | |
| Video Compression | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 |
| Video Resolution | 8MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| IP Video Input | 4 CH | 8 CH | 8 CH | 16 CH |
| Bandwidth In/Out | 80Mbps / 64Mbps | 80Mbps / 64Mbps | 160Mbps / 64Mbps | 160Mbps / 64Mbps |
| Display | HDMI 4k / VGA up to 1080p | HDMI 4k / VGA up to 1080p | HDMI 4k / VGA up to 1080p same layout | HDMI 4k / VGA up to 1080p same layout |
| Playback | 4 CH | 8 CH | 8 CH | 16 CH |
| Audio In/Out | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA |
| Alarm In/Out | - | - | 4/1 | 4/1 |
| Ethernet | 1x RJ45 10M/100M | 1x RJ45 10M/100M | 1x RJ45 10M/100M/1000M | 1x RJ45 10M/100M/1000M |
| PoE Ports | 4 Ports (802.3af/at) | 8 Ports (802.3af/at) | 8 Ports (802.3af/at) | 16 Ports (802.3af/at) |
| USB | Rear panel: 1x USB2.0, 1x USB3.0 | Rear panel: 1x USB2.0, 1x USB3.0 | Front panel: 1x USB2.0, Rear panel: 1x USB3.0 | Front panel: 1x USB2.0, Rear panel: 1x USB3.0 |
| Storage / RAID | 1x SATA up to 8TB/ea | 1x SATA up to 8TB/ea | 2x SATA up to 10TB/ea | 2x SATA up to 10TB/ea |
| Power | 48V DC | 48V DC | 100 ~ 240V AC | 100 ~ 240V AC |

| Model | 4K NVR SERIES | | | | |
|-------------------|--|--|---|---|--|
| | NVR302-16E-IF (AI NVR) | NVR304-32EP-B | NVR308-32R | NVR308-64R | NVR516-128 |
| | | | | | |
| Video Compression | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 |
| Video Resolution | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| IP Video Input | 16 CH | 32 CH | 32 CH | 64 CH | 128 CH |
| Bandwidth In/Out | 160Mbps / 320Mbps | 320Mbps / 320Mbps | 320Mbps / 320Mbps | 320Mbps / 320Mbps | 512Mbps / 384Mbps |
| Display | HDMI 4k / VGA up to 1080p | 1x HDMI 4k / 1x VGA/HDMI up to 1080p | 1x HDMI 4k / 1x VGA/HDMI up to 1080p / CVBS output | 1x HDMI 4k / 1x VGA/HDMI up to 1080p / CVBS output | 1x HDMI 4k / 1x VGA/HDMI up to 1080p / CVBS output |
| Playback | 16 CH | 16 CH | 16 CH | 16 CH | 16 CH |
| Audio In/Out | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA |
| Alarm In/Out | 8/2 | 16/4 | 16/4 | 16/4 | 24/8 |
| Ethernet | 2x RJ45 10M/100M/1000M | 1x RJ45 10M/100M | 1x RJ45 10M/100M | 2x RJ45 10M/100M/1000M | 4x RJ45 10M/100M/1000M 2x 1000M SFP Ethernet Interface |
| PoE Ports | - | 16 Ports (802.3af/at) | - | - | - |
| USB | Rear panel: 1x USB3.0, 1x USB2.0 | Front panel: 2x USB2.0 Rear panel: 1x USB3.0 | Rear panel: 2x USB2.0, 1x USB3.0 | Rear panel: 2x USB2.0, 1x USB3.0 | Rear panel: 4x USB3.0 |
| Storage / RAID | 2x SATA up to 10TB/ea | 4x SATA up to 10TB/ea | 8x SATA up to 10TB/ea + 1 eSATA / RAID 0, 1, 5, 6, 10 | 8x SATA up to 10TB/ea + 1 eSATA / RAID 0, 1, 5, 6, 10 | 16x SATA up to 10TB/ea + 1x eSATA + 2x miniSAS / RAID 0, 1, 5, 6, 10, 50, 60 |
| Power | 12V DC | 100 ~ 240V AC | 48V DC | 48V DC | 48V DC |

4 in 1 Hybrid

Network Video Recorder System



WIDE VOLTAGE RANGE:
Enhanced reliability of system running



P2P CLOUD SERVICE:
Easy setup via scanning QR code



ANR:
Enhance storage reliability by installing an SD card in the camera



PLUG & PLAY:
Save time during camera installation



CLOUD UPGRADE OPTION:
One-click to upgrade to latest firmware



ONVIF INTERFACE:
Ensure compatibility with a wide range of third-party cameras



ULTRA H.265:
Save on bandwidth and storage space



| Model | 4-IN-1 HYBRID | | | |
|-------------------|---|---|---|---|
| | XVR301-04Q | XVR301-08Q | XVR302-08Q | XVR302-16Q |
| | | | | |
| Video Compression | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 | Ultra 265/H.265/H.264 |
| Video Resolution | 8MP Lite/5MP Lite/4MPLite/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP Lite/5MP Lite/4M/Lite/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP Lite/5MP Lite/4MPLite/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP Lite/5MP Lite/4MPLite/3MP/1080p/960p/720p/D1/2CIF/CIF |
| IP Video Input | 4 CH AHD/TVI/CVI/CVBS+2 IP (up to 6) | 8 CH AHD/TVI/CVI/CVBS+4 IP (up to 12) | 8 CH AHD/TVI/CVI/CVBS+4 IP (up to 12) | 16 CH AHD/TVI/CVI/CVBS+8 IP (up to 24) |
| Bandwidth In/Out | 48Mbps / 60Mbps | 56Mbps / 64Mbps | 56Mbps / 64Mbps | 72Mbps / 80Mbps |
| Display | HDMI / VGA up to 1080p / CVBS output | HDMI / VGA up to 1080p / CVBS output | HDMI / VGA up to 1080p / CVBS output | HDMI / VGA up to 1080p / CVBS output |
| Playback | 4 CH | 8 CH | 8 CH | 16 CH |
| Audio In/Out | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA |
| Alarm In/Out | - | - | - | - |
| Ethernet | 1x RJ45 10M/100M | 1x RJ45 10M/100M | 1x RJ45 10M/100M | 1x RJ45 10M/100M |
| Analog Capacity | 4 BNC Inputs | 8 BNC Inputs | 8 BNC Inputs | 16 BNC Inputs |
| USB | Rear panel: 2 x USB2.0 | Rear panel: 2 x USB2.0 | Rear panel: 1 x USB2.0, Front panel: 1 x USB2.0 | Rear panel: 1 x USB2.0, Front panel: 1 x USB2.0 |
| Storage / RAID | 1x SATA up to 8TB/ea | 1x SATA up to 8TB/ea | 2x SATA up to 8TB/ea | 2x SATA up to 8TB/ea |
| Power | 12V DC | 12V DC | 12V DC | 12V DC |

PACKAGE KITS

WIDE VOLTAGE RANGE:
Enhanced reliability of system running

ONVIF INTERFACE:
Ensure compatibility with a wide range of third-party cameras

ANR:
Enhance storage reliability by installing an SD card in the camera

LONG RANGE POE:
Up to 250m range data + power

P2P CLOUD SERVICE:
Easy setup via scanning QR code

CLOUD UPGRADE OPTION:
One-click to upgrade to latest firmware

PLUG & PLAY:
Save time during camera installation

ULTRA H.265:
Save on bandwidth and storage space

8CH NVR KIT W/4MP TURRET CAMERAS

GS-KIT-301-P8-T-4M



| 8CH NVR Kit w/4MP Turret Cameras |
|--|
| 8CH NVR Kit, Including 2TB HDD |
| NVR301-08LS2-P8, including 8 PoE |
| 4x Turret Cameras Included, 2.8mm Lens |
| 4MP (2592*1520 @ 20fps) |
| IR up to 30m, Digital WDR |
| IP67, -30°C ~ 60°C Working Environment |
| Plug & Play, Cloud Upgrade |

8CH WI-FI NVR KIT W/ WI-FI BULLET CAMERAS

GS-KIT-301-P8-B-WIRELESS



| 8CH Wi-Fi NVR Kit w/ Wi-Fi Bullet Cameras |
|---|
| 8CH NVR Kit, Including 1TB HDD |
| NVR301-08LS2-W, no PoE Ports |
| 4x Bullet Cameras Included, 4.0mm Lens |
| 2MP (1920*1080 @ 30fps) |
| IR up to 30m, Digital WDR |
| IP67, -30°C ~ 60°C Working Environment |
| Wireless 2.4GHz, Plug & Play, Cloud Upgrade |


Acusight Series With Independent AI Feature

Launched by Uniview, Acusight is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to focus on defined targets.

Smart Intrusion Prevention



Smart Intrusion Prevention Operation Process

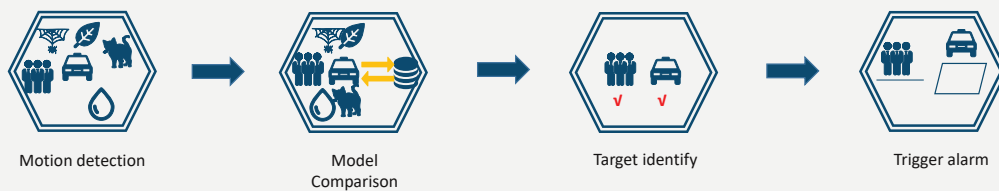


Benefits of UNV SIP

| | | |
|--------------------------|---|---------------------------------------|
| Accuracy | ≥ | 99% |
| Error detection accuracy | ≤ | 1% |
| Detection classification | = | Human Vehicle Non-motor vehicle |

Uniview Acusight is available on the new 4MP series with human body detection. Also available on 5MP/8MP series ending with -IO with advanced human/vehicle detection, reducing false alarms.

Smart Intrusion Prevention Features

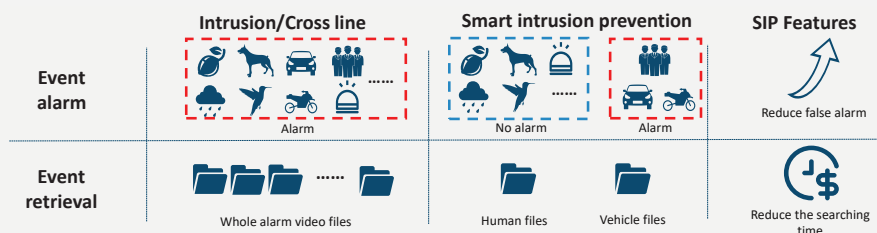

Smart Intrusion Prevention Applications



HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

BUILT-IN MICROPHONE

120DB WDR

250M RANGE POE

IP67 WATER RESIST

STARLIGHT ENHANCED

IP Fixed Mini-Dome Camera



| IPC324SR3-DVPF28-F IPC324SR3-DVPF40-F | IPC325SB-DF28K-IO IPC325SB-DF40K-IO | IPC328LR3-DVSPF28-F IPC328LR3-DVSPF40-F |
|--|--|--|
| 4MP (2688*1520 @ 30fps) | 5MP (2880*1620 @ 25fps) | 8MP (3840*2160 @ 20fps) |
| 2.8mm or 4mm Fixed Lens | 2.8mm or 4mm Fixed Lens | 2.8mm or 4mm Fixed Lens |
| True WDR 120dB | True WDR 120dB, LightHunter | True WDR 120dB |
| 0.01 min lux | 0.003 min lux | 0.05 min lux |
| IP67 + IK10 | IP67 + IK10 | IP67 + IK10 |
| White or black housing | White or black housing | White |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

ACCESSORIES ▼



AE-TR-JB03-D-IN



AE-TR-WM03-D-IN



AE-TR-CM24-IN



AE-TR-SE24-IN



AE-TR-SE24-A-IN

IP Fixed Turret Camera



A



B C

| A | B | C |
|--|--|--|
| IPC3614SR3-ADPF28-F IPC3614SR3-ADPF40-F | IPC3615SB-ADF28KM-IO IPC3615SB-ADF40KM-IO | IPC3618SB-ADF28KM-IO IPC3618SB-ADF40KM-IO |
| 4MP (2688*1520 @ 30fps) | 5MP (2880*1620 @ 25fps) | 8MP (3840*2160 @ 20fps) |
| 2.8mm or 4mm Fixed Lens | 2.8mm or 4mm Fixed Lens | 2.8mm or 4mm Fixed Lens |
| True WDR 120dB | True WDR 120dB, LightHunter | True WDR 120dB |
| 0.01 min lux | 0.003 min lux | 0.01 min lux |
| IP67, Built-in Mic | IP67, Built-in Mic | IP67, Built-in Mic |
| White or black housing | White housing | White or black housing |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

ACCESSORIES ▼



AE-TR-WM03-D-IN



AE-TR-CM24-IN



AE-TR-SE24-IN



AE-TR-SE24-A-IN



AE-TR-JB03-I-IN
A



AE-TR-JB03-G-IN
B C

HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

BUILT-IN MICROPHONE

120DB WDR

250M RANGE POE

IP67 WATER RESIST

STARLIGHT ENHANCED

Low-Profile Dome



| |
|--------------------------------|
| IPC354SR3-ADNPF28-F |
| 4MP (2880*1620 @ 25fps) |
| 2.8mm Fixed Lens |
| True WDR 120dB |
| 0.01 min lux |
| Indoor Only, Built-in Mic |
| White housing |
| Micro SD Card Slot up to 256GB |

ACCESSORIES ▼



UNV ColorHunter



A



B

| A | B |
|--|--|
| IPC2225SE-DF40K-WL-IO IPC2225SE-DF60K-WL-IO | IPC3615SE-ADF28KM-WL-IO IPC3615SE-ADF40KM-WL-IO |
| 5MP (2880*1620 @ 25fps) | 5MP (2880*1620 @ 25fps) |
| 4mm or 6mm Fixed Lens | 2.8mm or 4mm Fixed Lens |
| True WDR 120dB | True WDR 120dB |
| 0.001 min lux, LightHunter | 0.001 min lux, LightHunter |
| IP67, White Light LEDs | IP67, White Light LEDs, Built-in Mic |
| White housing | White housing |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

ACCESSORIES ▼





HIGH RESOLUTION



INTRUSION DETECTION



WIDE TEMP RANGE



BUILT-IN MICROPHONE



120DB WDR



250M RANGE POE



IP67 WATER RESIST

IP Mini-Bullet Camera



A B



C

| A | B | C |
|--|--|--|
| IPC2124SR3-ADPF28M-F IPC2124SR3-ADPF40M-F | IPC2125SB-ADF28KM-IO IPC2125SB-ADF40KM-IO | IPC2128SB-ADF28KMC-IO IPC2128SB-ADF40KMC-IO |
| 4MP (2688*1520 @ 30fps) | 5MP (2880*1620 @ 25fps) | 8MP (3840*2160 @ 20fps) |
| 2.8mm or 4mm Fixed Lens | 2.8mm or 4mm Fixed Lens | 2.8mm or 4mm Fixed Lens |
| True WDR 120dB | True WDR 120dB, LightHunter | True WDR 120dB, LightHunter |
| 0.01 min lux, IR up to 30m | 0.003 min lux, IR up to 40m | 0.01 min lux, IR up to 30m |
| IP67 | IP67, Built-in Mic | IP67, Built-in Mic + Speaker |
| White housing | White housing | White housing |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

ACCESSORIES ▼



AE-TR-UP06-A



AE-TR-JB05-A-IN



AE-TR-JB05-B-IN

A B

C

HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

120DB WDR

250M RANGE POE

BUILT-IN MICROPHONE

Dome Camera



A



B C


| A | B | C |
|---------------------------------------|---|---------------------------------------|
| IPC3534SR3-DVPZ-F | IPC3235SB-ADZK-IO | IPC3238SB-ADZK-IO |
| 4MP (2688*1520 @ 30fps) | 5MP (2880*1620 @ 25fps) | 8MP (3840*2160 @ 20fps) |
| 2.8mm - 12mm Motorized Varifocal Lens | 2.7mm - 13.5mm Motorized Varifocal Lens | 2.8mm - 12mm Motorized Varifocal Lens |
| True WDR 120dB | True WDR 120dB, LightHunter | True WDR 120dB, LightHunter |
| 0.003 min lux, IR up to 30m | 0.002 min lux, IR up to 40m | 0.003 min lux, IR up to 40m |
| IP67 + IK10 | IP67 + IK10, Built-in Mic | IP67 + IK10, Built-in Mic |
| White housing | White housing | White housing |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |



AE-TR-CM24-IN



AE-TR-SE24-IN



AE-TR-SE24-A-IN



AE-TR-JB03-E-IN

A



AE-TR-WM03-B-IN

A



AE-TR-JB04-C-IN

B C



AE-TR-WM04-B-IN

B C

ACCESSORIES ▼

Turret Camera



A



B

| A | B |
|---------------------------------------|---------------------------------------|
| IPC3634SR3-ADPZ-F | IPC3638SB-ADZK-IO |
| 4MP (2688*1520 @ 30fps) | 8MP (3840*2160 @ 20fps) |
| 2.8mm - 12mm Motorized Varifocal Lens | 2.8mm - 12mm Motorized Varifocal Lens |
| True WDR 120dB | True WDR 120dB, LightHunter |
| 0.003 min lux, IR up to 30m | 0.003 min lux, IR up to 40m |
| IP67, Built-in Mic | IP67, Built-in Mic |
| White Housing | White Housing |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |



AE-TR-JB03-E-IN



AE-TR-WM03-B-IN



AE-TR-CM24-IN



AE-TR-SE24-IN



AE-TR-SE24-A-IN

ACCESSORIES ▼

HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

120DB WDR

250M RANGE POE

STARLIGHT ENHANCED

IP Varifocal Bullet Camera



| IPC2325SB-DZK-IO | IPC2328SB-DZK-IO |
|---|---------------------------------------|
| 5MP (2880*1620 @ 30fps) | 8MP (3840*2160 @ 20fps) |
| 2.7mm - 13.5mm Motorized Varifocal Lens | 2.8mm - 12mm Motorized Varifocal Lens |
| True WDR 120dB, LightHunter | True WDR 120dB, LightHunter |
| 0.002 min lux, IR up to 50m | 0.003 min lux, IR up to 50m |
| IP67 | IP67 |
| White housing | White housing |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

ACCESSORIES ▼



IP Mini-PTZ Cameras



| A | B |
|---|---|
| IPC6415SR-X5UPW-VG | IPC675LFW-AX4DUPKC-VG |
| 5MP (2592*1944 @ 30fps) | 5MP (2880*1620 @ 25fps) |
| 2.7mm - 13.5mm Motorized Varifocal Lens | 2.8mm - 12mm Motorized Varifocal Lens |
| IR up to 30m, True WDR 120dB | IR up to 50m, True WDR 120dB |
| 0.002 min lux, Starlight | 0.003 min lux, LightHunter |
| Indoor Only, Built-in Mic & Speaker | IP66, Built-in Mic + Speaker |
| Wi-Fi Built-in | Powerful Floodlight + Human Body Auto-tracking |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼



HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

120DB WDR

250M RANGE POE

STARLIGHT ENHANCED

PTZ Camera



A



B



C



| A | A |
|--|--|
| IPC6322SR-X22P-D | IPC6322SR-X33DUP |
| 2MP (1920*1080 @ 60fps) | 2MP (1920*1080 @ 60fps) |
| 5.2 - 144.4mm Motorized Varifocal Lens | 4.5 - 148.5mm Motorized Varifocal Lens |
| IR up to 150m, True WDR 120dB | IR up to 150m, True WDR 120dB |
| 0.001 min lux, LightHunter | 0.001 min lux, LightHunter |
| IP66 | IP66 |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

| B | C |
|--|--|
| IPC6622SR-X33-VF | IPC6252SL-X33UP |
| 2MP (1920*1080 @ 60fps) | 2MP (1920*1080 @ 30fps) |
| 4.5 - 148.5mm Motorized Varifocal Lens | 4.5 - 148.5mm Motorized Varifocal Lens |
| IR up to 150m, True WDR 120dB | Laser IR up to 500m, True WDR 120dB |
| 0.001 min lux, LightHunter | 0.002 min, Starlight |
| IP66 | IP66 |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

| | |
|--|------------------------------------|
| IPC6852SR-X38UG | IPC6852SR-X44U |
| 2MP (1920*1080 @ 30fps) | 2MP (1920*1080 @ 30fps) |
| 5.7 - 216.6mm Motorized Varifocal Lens | 5 - 220mm Motorized Varifocal Lens |
| IR up to 250m, True WDR 120dB | IR up to 250M, True WDR 120dB |
| 0.0005 min lux, Starlight | 0.002 min lux, Starlight |
| IP66, SFP & RJ45 interface | IP66, SFP & RJ45 interface |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

ACCESSORIES ▼



AE-TR-WE45



AE-TR-WE45-A



AE-TR-JB12-IN



AE-TR-UC08-A



AE-TR-WE45-B



AE-TR-UP08-A

HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

120DB WDR

250M RANGE POE

STARLIGHT ENHANCED



A



B

PTZ Camera

| A | B |
|-------------------------------------|---------------------------------------|
| IPC6258SR-X22DUP | IPC6854SR-X38UP-VC |
| 8MP (3840*2160 @ 30fps) | 4MP (2688*1520 @ 60fps) |
| 6.5- 143mm Motorized Varifocal Lens | 5.7- 216.6mm Motorized Varifocal Lens |
| IR up to 200m, True WDR 120dB | IR up to 250m, True WDR 120dB |
| 0.003 min lux, Starlight | 0.0005 min lux, Starlight |
| IP66 | IP66, Optical and Digital Defog |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

ACCESSORIES ▼



AE-TR-WE45



AE-TR-WE45-A



AE-TR-JB12-IN



AE-TR-UC08-A



AE-TR-WE45-B



AE-TR-UP08-A

PTZ Camera



| | |
|------------------------------------|---|
| IPC7622ER-X44U | IPC7622EL-X55UG |
| 2MP (1920*1080 @ 60fps) | 2MP (1920*1080 @ 60fps) |
| 5 - 220mm Motorized Varifocal Lens | 6.4 - 352mm Motorized Varifocal Lens |
| IR up to 300m, True WDR 120dB | Laser IR up to 1000m, True WDR 120dB |
| 0.0005 min lux, LightHunter | 0.002 min lux, LightHunter |
| IP66, Intelligent Wiper | IP66, Intelligent Wiper, SFP + Ethernet |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

Multi-Sensor Panoramic



| |
|-----------------------------------|
| IPC8542ER5-DUG |
| 8MP (4096*1800 @ 30fps) |
| 4.2mm Fixed Lens, 180° wide angle |
| IR up to 50m, True WDR 120dB |
| 0.002 min lux, Starlight |
| IP67, SFP + Ethernet |
| Micro SD Card Slot up to 256GB |



Disadvantages of traditional temperature detection measures:

- Contact risk
- Manual inspection with high labor cost
- Low measurement efficiency
- Difficult to control: Miss and false detection

ADVANTAGE OF GST NON-CONTACT TEMPERATURE SCREENING

UNIVIEW THERMAL SCREENING SOLUTIONS

- To reduce the risk of spreading Covid-19, Uniview has developed multiple economic solutions for screening temperature.
- Non-contact thermal measurement ensures a fast and safe way to screen for a fever. By checking for an elevated temperature, you can reduce the risk of transmission to others.



Safer

Non-contact
measurement to avoid
physical contact



Faster

Uninterrupted
thermal detection






Smarter

AI detection
and reducing
false alarms



THERMAL CAMERAS COVID-19 SOLUTION

| | | |
|--|---|--|
| <p>UNi2168A</p> |  | <ul style="list-style-type: none"> • Handheld thermal measurement device • Custom Hi-Low threshold setting • Audio alert + white flashing light • USB-C charge cable included • 160*120 thermal imager • Best results > 1M distance from target |
| <p>OET-213H-BTS1 OET-213H-BTM32</p> |  | <ul style="list-style-type: none"> • Face recognition w/temp measurement • Temp info stored in database • Wrist or forehead module options • Wall mounted (floor stand optional) • 7" screen, 600*1024 resolution • Best results > 1M distance from target |
| <p>CW180</p> |  | <ul style="list-style-type: none"> • All-in-one thermal measurement device • Includes 2MP camera, metal stand, monitor, NVR, and wrist temperature module • Lockable casters, easy to move • 32" monitor with temp display and live view • Temp measured via wrist, $\pm 0.1^{\circ}\text{C}$ accuracy |
| <p>OPD-533TM</p> |  | <ul style="list-style-type: none"> • Metal detector gate + wrist temp module • Real-time statistics, people counting • Audio alert, abnormal temperature • 18 metal detection zones via red LED • Mask detection • Temp measured via wrist, $\pm 0.1^{\circ}\text{C}$ accuracy |
| <p>TIC2531-NB</p> |  | <ul style="list-style-type: none"> • 4MP dual spectrum camera • Built-in mic + speaker, blackbody included • Red/blue flashing strobe lights • Up to 5 targets at once, crowd screening • 384*288 thermal imager • Best results >3M distance from target |
| <p>TIC600-NB</p> |  | <ul style="list-style-type: none"> • 2MP dual spectrum camera • Software saves temperature info to a PC • Up to 5 targets at once, crowd screening • Blackbody included for better accuracy • 384*288 thermal imager • Best results >5M distance from target |

PRIME NVR



WIDE VOLTAGE RANGE:
Enhanced reliability of system running



PLUG & PLAY:
Save time during camera installation






P2P CLOUD SERVICE:
Easy setup via scanning QR code







ULTRA H.265:
Save on bandwidth and storage space



ANR:
Enhance storage reliability by installing an SD card in the camera

| | GS-NVR32P4-4Q | GS-NVR32P8-8 | GS-NVR32P6-16 |
|-------------------|---|--|---|
| Model |  |  |  |
| Video Compression | H.265+/H.264+/H.264 | H.265+/H.265/H.264+/H.264/MPEG4 | H.265+/H.265/H.264+/H.264/MPEG4 |
| Video Resolution | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| IP Video Input | 4 CH | 8 CH | 16 CH |
| Bandwidth In/Out | 40Mbps / 80Mbps | 160Mbps / 160Mbps | 256Mbps / 160Mbps |
| Display | HDMI 4k / VGA up to 1080p same layout | HDMI 4k / VGA up to 1080p | HDMI 4k / VGA up to 1080p |
| Playback | 4CH | 8 CH | 8 CH |
| Audio In/Out | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA |
| Alarm In/Out | - | 4/1 | 4/1 |
| Ethernet | 1x RJ45 10M/100M | 1x RJ45 10M/100M/1000M | 1x RJ45 10M/100M/1000M |
| PoE Ports | 4 Ports (802.3af/at) | 8 Ports (802.3af/at) | 16 Ports (802.3af/at) |
| USB | Front panel: 1x USB2.0, Rear panel: 1x USB2.0 | Front panel: 1x USB2.0, Rear panel: 1x USB3.0 | Front panel: 1x USB2.0, Rear panel: 1x USB3.0 |
| Storage / RAID | 1x SATA up to 8TB/ea | 2x SATA up to 8TB/ea | 2x SATA up to 8TB/ea |
| Power | 48V DC | 110 ~ 240V AC | 110 ~ 240V AC |

| | GS-NVR51P6-16 | GS-NVR51P6-32 | GS-NVR710-32R |
|-------------------|---|--|---|
| Model |  |  |  |
| Video Compression | H.265+/H.265/H.264+/H.264/MPEG4 | H.265+/H.265/H.264+/H.264/MPEG4 | H.265+/H.265/H.264+/H.264/MPEG4 |
| Video Resolution | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| IP Video Input | 16 CH | 32 CH | 32 CH |
| Bandwidth In/Out | 160Mbps / 256Mbps | 256Mbps / 256Mbps | 320Mbps / 256Mbps |
| Display | 2x HDMI 4k / 1x VGA up to 1080p / CVBS output | 2x HDMI 4k / 1x VGA up to 1080p / CVBS output | 2x HDMI 4k / 2x VGA up to 1080p |
| Playback | 16 CH | 16 CH | 16 CH |
| Audio In/Out | 1 / 1, RCA | 1 / 1, RCA | 1 / 1, RCA |
| Alarm In/Out | 16/4 | 16/4 | 16/4 |
| Ethernet | 1x RJ45 10M/100M/1000M | 1x RJ45 10M/100M/1000M | 2x RJ45 10M/100M/1000M |
| PoE Ports | 16 Ports (802.3af/at) | 16 Ports (802.3af/at) | - |
| USB | Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0 | Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0 | Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0 |
| Storage / RAID | 4x SATA up to 8TB/ea + 1 eSATA | 4x SATA up to 8TB/ea + 1 eSATA | 8x SATA up to 10TB/ea + 1 eSATA / RAID 0, 1, 5, 6, 10 |
| Power | 110 ~ 240V AC | 110 ~ 240V AC | 110 ~ 240V AC |

| | GS-NVR51P6-16 | GS-NVR51P6-32 | GS-NVR710-32R |
|-------------------|---|--|---|
| Model |  |  |  |
| Video Compression | H.265+/H.265/H.264+/H.264/MPEG4 | H.265+/H.265/H.264+/H.264/MPEG4 | H.265+/H.265/H.264+/H.264/MPEG4 |
| Video Resolution | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/ 720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| IP Video Input | 64 CH | 128 CH | 256 CH |
| Bandwidth In/Out | 320Mbps / 256Mbps | 576Mbps / 512Mbps | 768Mbps / 768Mbps |
| Display | 2x HDMI 4k / 2x VGA up to 1080p | 2x HDMI 4k / 1x VGA up to 1080p | 2x HDMI 4k / 1x VGA up to 1080p |
| Playback | 16 CH | 16 CH | 16 CH |
| Audio In/Out | 1 / 2, RCA | 1 / 1, RCA | 1 / 1, RCA |
| Alarm In/Out | 16/4 | 16/8 | 16/8 |
| Ethernet | 2x RJ45 10M/100M/1000M | 4x RJ45 10M/100M/1000M | 4x RJ45 10M/100M/1000M |
| PoE Ports | - | - | - |
| USB | Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0 | Front panel: 2 x USB2.0, Rear panel: 2 x USB3.0 | Front panel: 1 x USB2.0, Rear panel: 2 x USB3.0 |
| Storage / RAID | 8x SATA up to 10TB/ea + 1 eSATA / RAID 0, 1, 5, 6, 10 | 16x SATA up to 10TB/ea + 1 eSATA / RAID 0, 1, 5, 6, 10 | 24x SATA up to 10TB/ea + 1 eSATA / RAID 0, 1, 5, 6, 10 |
| Power | 110 ~ 240V AC | 110 ~ 240V AC | 100 ~ 240V AC |

HIGH RESOLUTION

INTRUSION DETECTION

IP67 WATER RESIST

120DB WDR

WIDE TEMP RANGE

Fixed Dome



| GS-P646-F28 GS-P646-F40 | GS-P686-F28 GS-P686-F40 |
|--------------------------------|--------------------------------|
| 4MP (2688*1520 @ 30fps) | 8MP (3840*2160 @ 15fps) |
| 2.8mm or 4mm Fixed Lens | 2.8mm or 4mm Fixed Lens |
| True WDR 120dB | True WDR 120dB |
| 0.008 min lux | 0.01 min lux |
| IP67 + IK10 | IP67 + IK10 |
| White or black housing | White housing |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼



Fixed Turret Camera



| GS-P647-F28 GS-P647-F40 | GS-P687-F28 GS-P687-F40 |
|--------------------------------|--------------------------------|
| 4MP (2688*1520 @ 30fps) | 8MP (3840*2160 @ 15fps) |
| 2.8mm or 4mm Fixed Lens | 2.8mm or 4mm Fixed Lens |
| True WDR 120dB | True WDR 120dB |
| 0.008 min lux | 0.028 min lux |
| IP67 | IP67 |
| White or black housing | White housing |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼




 **HIGH RESOLUTION**

 **INTRUSION DETECTION**

 **WIDE TEMP RANGE**

 **BUILT-IN MICROPHONE**

 **120DB WDR**

 **250M RANGE POE**

 **IP67 WATER RESIST**

IP Prime Fixed Bullet



| | |
|--|---|
| GS-P648-F40 GS-P648-F60 | GS-P688-F28 GS-P688-F40 GS-P688-F60 GS-P688-F120 |
| 4MP (2688*1520 @ 30fps) | 8MP (3840*2160 @ 15fps) |
| 4mm or 6mm Fixed Lens | 2.8mm, 6mm, 12mm Fixed Lens |
| True WDR 120dB | True WDR 120dB |
| 0.008 min lux | 0.028 min lux |
| IP67 | IP67 |
| White housing | White housing |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼



IP Prime ColorVu Camera



| A | B |
|--|--|
| GS-P647-TC-F40 GS-P647-TC-F60 | GS-P648-TC-F40 GS-P648-TC-F60 |
| 4MP (2688*1520 @ 30fps) | 4MP (2688*1520 @ 30fps) |
| 4mm or 6mm Fixed Lens | 4mm or 6mm Fixed Lens |
| True WDR 120dB | True WDR 120dB |
| 0.0014 min lux | 0.0014 min lux |
| IP67, White Light LEDs, Built-in Mic | IP67, White Light LEDs |
| White housing | White housing |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼



HIGH RESOLUTION

INTRUSION DETECTION

IP67 WATER RESIST

120DB WDR

WIDE TEMP RANGE

IP Prime Varifocal Dome Camera



| GS-P646-VWZ | GS-P686-VWZ |
|---------------------------------------|---------------------------------------|
| 4MP (2688*1520 @ 30fps) | 8MP (3840*2160 @ 15fps) |
| 2.8mm - 12mm Motorized Varifocal Lens | 2.8mm - 12mm Motorized Varifocal Lens |
| True WDR 120dB | True WDR 120dB |
| 0.008 min lux | 0.028 min lux |
| IP67, IK10 | IP67, IK10 |
| White housing | White housing |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼



DS-1280ZJ-DM55



DS-1473ZJ-155

IP Prime Varifocal Turret Camera



| GS-P647-VWZ | GS-P687-VWZ |
|---------------------------------------|---------------------------------------|
| 4MP (2688*1520 @ 30fps) | 8MP (3840*2160 @ 15fps) |
| 2.8mm - 12mm Motorized Varifocal Lens | 2.8mm - 12mm Motorized Varifocal Lens |
| True WDR 120dB | True WDR 120dB |
| 0.011 min lux | 0.01 min lux |
| IP67, IK10 | IP67, IK10 |
| White housing | White housing |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼



DS-1280ZJ-DM21



DS-1273ZJ-140

HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

120DB WDR

250M RANGE POE

IP67 WATER RESIST

IP Prime Varifocal Bullet Camera



| GS-P648-VWZ | GS-P688-VWZ |
|---------------------------------------|---------------------------------------|
| 4MP (2688*1520 @ 30fps) | 8MP (3840*2160 @ 15fps) |
| 2.8mm - 12mm Motorized Varifocal Lens | 2.8mm - 12mm Motorized Varifocal Lens |
| True WDR 120dB | True WDR 120dB |
| 0.008 min lux | 0.01 min lux |
| IP67, IK10 | IP67, IK10 |
| White housing | White housing |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼



DS-1260ZJ



DS-1275ZJ

IP Prime Fisheye Camera



| GS-PA06-FEA | GS-PA12-FEA |
|--------------------------------|--------------------------------|
| 6MP (3072*2048 @ 25fps) | 12MP (4000*3072 @ 20fps) |
| 1.27mm Fisheye Lens | 1.98mm Fisheye Lens |
| Digital WDR | Digital WDR |
| 0.05 min lux | 0.01 min lux |
| IP66, Built-in Mic & Speaker | IP66, Built-in Mic & Speaker |
| White housing | White housing |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

ACCESSORIES ▼



DS-1280ZJ-DM25



DS-1273ZJ-DM25

HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

120DB WDR

IP67 WATER RESIST

Camera



A B

| A | B |
|--------------------------------------|--|
| GS-P924-PTZ15X | GS-P944-PTZ25X |
| 2MP (1920*1080 @ 60fps) | 4MP (2560*1440 @ 30fps) |
| 5mm - 75mm Motorized Varifocal Lens | 4.8mm - 120mm Motorized Varifocal Lens |
| IR up to 50m, True WDR 120dB | IR up to 50m, True WDR 120dB |
| 0.005 min lux, Starlight | 0.005 min lux, Starlight |
| IP66 + IK10 | IP66 + IK10 |
| Smart Tracking , Audio In/Out | Smart Tracking , Alarm + Audio In/Out |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |



C



D

| C | D |
|--|--|
| GS-P946-PTZ25X | GS-P946A-PTZ25X |
| 4MP (2560*1440 @ 30fps) | 4MP (2560*1440 @ 30fps) |
| 4.8mm - 120mm Motorized Varifocal Lens | 4.8mm - 120mm Motorized Varifocal Lens |
| IR up to 100m, True WDR 120dB | IR up to 150m, True WDR 120dB |
| 0.005 min lux, Starlight | 0.005 min lux, Starlight |
| IP66, PoE+ Required | IP66, PoE+ Required |
| No Alarm or Audio In/Out | Smart Tracking , Alarm + Audio In/Out |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |



E F

| E | F |
|--|--|
| GS-P986-PTZ25X | GS-P986-PTZ36X |
| 8MP (4096*2160 @ 30fps) | 8MP (4096*2160 @ 30fps) |
| 7.5mm - 187.5mm Motorized Varifocal Lens | 7.5mm - 270mm Motorized Varifocal Lens |
| IR up to 200m, Digital WDR | IR up to 200m, Digital WDR |
| 0.005 min lux, Starlight | 0.005 min lux, Starlight |
| IP67, PoE++ Required | IP67, PoE++ Required |
| Smart Tracking , Alarm + Audio In/Out | Smart Tracking , Alarm + Audio In/Out |
| Micro SD Card Slot up to 256GB | Micro SD Card Slot up to 256GB |

ACCESSORIES ▼



DS-1605ZJ

A B



DS-1275ZJ

A B



DS-1602ZJ

C D E F



DS-1672ZJ

C D E F

HIGH RESOLUTION

INTRUSION DETECTION

WIDE TEMP RANGE

120DB WDR

250M RANGE POE

IP67 WATER RESIST

IP Special Camera



| |
|----------------------------------|
| GS-P646-WDA |
| 4MP (2688*1520 @ 30fps) |
| 2.8mm Fixed Lens |
| True WDR 120dB, Starlight |
| 0.008 min lux, IR up to 10m |
| IP66 + IK8, Built-in Mic |
| White housing |
| Micro SD Card Slot up to 128GB |

ACCESSORIES



DS-1280ZJ-DM46



DS-1272ZJ-120



| |
|--------------------------------|
| GS-P304-CU |
| 4MP (2688*1520 @ 30fps) |
| 2.8mm Fixed Lens |
| True WDR 120dB |
| 0.01 min lux, IR up to 10m |
| IP67, Built-in Mic + Speaker |
| Wi-Fi Supported |
| Micro SD Card Slot up to 128GB |

NO ACCESSORIES



A



B

| A | B |
|--------------------------------|--------------------------------|
| GS-P224-F28 | GS-P224-F37 |
| 2MP (1920*1080 @ 30fps) | 2MP (1920*1080 @ 30fps) |
| 2.8mm Fixed Lens | 3.7mm Fixed Lens |
| True WDR 120dB | True WDR 120dB |
| 0.025 min lux | 0.025 min lux |
| Indoor Only | Indoor Only |
| Pinhole Camera | Pinhole Camera |
| Micro SD Card Slot up to 128GB | Micro SD Card Slot up to 128GB |

HD-TVI DVR

 HIGH RESOLUTION

 SUPPORTS UPTO 10TB PER SATA

 CLOUD UPGRADE OPTION

 ONVIF COMPATIBLE

 PLUG & PLAY OPTION

2MP TVI Recorders

| | GS-DVR324-4 | GS-DVR324-8 | GS-DVR324-16 | GS-DVR524-32 |
|-------------------------|---|---|--|---|
| Model |  |  |  |  |
| Video Compression | H.265+/H.265/H.264+/H.264 | H.265+/H.265/H.264+/H.264 | H.265+/H.265/H.264+/H.264 | H.265+/H.265/H.264+/H.264 |
| HD-TVI Video Resolution | 3MP/1080p/960p/720p/D1/2CIF/CIF | 3MP/1080p/960p/720p/D1/2CIF/CIF | 3MP/1080p/960p/720p/D1/2CIF/CIF | 3MP/1080p/960p/720p/D1/2CIF/CIF |
| Video Format | HDTVI / HDCVI / AHD / 960H / IP | HDTVI / HDCVI / AHD / 960H / IP | HDTVI / HDCVI / AHD / 960H / IP | HDTVI / HDCVI / AHD / 960H / IP |
| Video Channels | 4 CH BNC + 1 IP (up to 5) | 8 CH BNC + 2 IP (up to 10) | 16 CH BNC + 2 IP (up to 18) | 32 CH BNC + 8 IP (up to 40) |
| Max. IPC Resolution | 4MP | 4MP | 4MP | 6MP |
| Display | HDMI / VGA up to 1080p / CVBS Output | HDMI / VGA up to 1080p / CVBS Output | HDMI 4k / VGA up to 1080p / CVBS Output | 1x HDMI 4k / 1x VGA/HDMI up to 1080p / CVBS Output |
| Playback | 4 CH | 8 CH | 16 CH | 16 CH |
| Audio In/Out | 1/1, RCA | 1/1, RCA | 1/1, RCA | 1 / 1, RCA |
| Alarm In/Out | - | - | - | 16/4 |
| Ethernet | 1x RJ45 10M/100M | 1x RJ45 10M/100M | 1x RJ45 10M/100M/1000M | 1x RJ45 10M/100M/1000M |
| USB | Front panel: 1x USB2.0, Rear panel: 1x USB2.0 | Front panel: 1x USB2.0, Rear panel: 1x USB3.0 | Front panel: 1x USB2.0, Rear panel: 1x USB3.0 | Front panel: 2x USB2.0, Rear panel: 1x USB3.0 |
| Storage / RAID | 1x SATA up to 6TB/ea | 1x SATA up to 6TB/ea | 1x SATA up to 6TB/ea | 4x SATA up to 8TB/ea + 1 eSATA |
| Power | 12V DC | 12V DC | 12V DC | 110 ~ 240V AC |

| 8MP TVI Recorders | | | |
|-------------------------|---|--|---|
| | GS-DVR326-4 | GS-DVR326-8E | GS-DVR326-8 |
| Model |  |  |  |
| Video Compression | H.265+/H.265/H.264+/H.264 | H.265+/H.265/H.264+/H.264 | H.265+/H.265/H.264+/H.264 |
| HD-TVI Video Resolution | 8MP(ch1)/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Video Format | HDTVI / HDCVI / AHD / 960H / IP | HDTVI / HDCVI / AHD / 960H / IP | HDTVI / HDCVI / AHD / 960H / IP |
| Video Channels | 4 CH BNC + 2 IP (up to 6) | 8 CH BNC + 4 IP (up to 12) | 8 CH BNC + 4 IP (up to 12) |
| Max. IPC Resolution | 6MP | 6MP | 6MP |
| Display | HDMI / VGA up to 1080p / CVBS Output | HDMI / VGA up to 1080p | HDMI 4K/ VGA up to 1080p / CVBS Output |
| Playback | 4 CH | 8 CH | 8 CH |
| Audio In/Out | 4 / 1, RCA | 1 / 1, RCA | 4 / 1, RCA |
| Alarm In/Out | 4/1 | - | 8/4 |
| Ethernet | 1x RJ45 10M/100M | 1x RJ45 10M/100M | 1x RJ45 10M/100M |
| USB | Front panel: 1x USB2.0, Rear panel: 1x USB2.0 | Front panel: 1x USB2.0, Rear panel: 1x USB2.0 | Front panel: 1x USB2.0, Rear panel: 1x USB2.0 |
| Storage / RAID | 1x SATA up to 10TB/ea | 1x SATA up to 10TB/ea | 2x SATA up to 10TB/ea |
| Power | 12V DC | 12V DC | 12V DC |

| 8MP TVI Recorders | | | |
|-------------------------|---|--|---|
| | GS-DVR326-16 | GS-DVR526-16 | GS-DVR526-32 |
| Model |  |  |  |
| Video Compression | H.265+/H.265/H.264+/H.264 | H.265+/H.265/H.264+/H.264 | H.265+/H.265/H.264+/H.264 |
| HD-TVI Video Resolution | 8MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | 8MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Video Format | HDTVI / HDCVI / AHD / 960H / IP | HDTVI / HDCVI / AHD / 960H / IP | HDTVI / HDCVI / AHD / 960H / IP |
| Video Channels | 16 CH BNC + 8 IP (up to 24) | 16 CH BNC + 16 IP (up to 32) | 32 CH BNC + 16 IP (up to 48) |
| Max. IPC Resolution | 6MP | 6MP | 6MP |
| Display | HDMI 4K/ VGA up to 1080p / CVBS Output | 1x HDMI 4k / 1x VGA/HDMI up to 1080p / CVBS output | 1x HDMI 4k / 1x VGA/HDMI up to 1080p / CVBS output |
| Playback | 16 CH | 16 CH | 16 CH |
| Audio In/Out | 4 / 1, RCA | 4 / 1, RCA | 4 / 1, RCA |
| Alarm In/Out | 16/4 | 16/4 | 16/4 |
| Ethernet | 1x RJ45 10M/100M | 2x RJ45 10M/100M/1000M | 2x RJ45 10M/100M/1000M |
| USB | Front panel: 1x USB2.0, Rear panel: 1x USB3.0 | Front panel: 2x USB2.0, Rear panel: 1x USB3.0 | Front panel: 2x USB2.0, Rear panel: 1x USB3.0 |
| Storage / RAID | 2x SATA up to 10TB/ea | 4x SATA up to 10TB/ea | 4x SATA up to 10TB/ea |
| Power | 12V DC | 110 ~ 240V AC | 110 ~ 240V AC |

ultra 255 HIGH RESOLUTION

4-in-1 4-in-1 TVI

IP67 WATER RESIST

HD-TVI Fixed Dome



| GS-T626-F28 | GS-T656-F28 |
|-------------------------|------------------------------------|
| 2MP (1920*1080 @ 30fps) | 5MP (2560*1944 @ 20fps) |
| 2.8mm Fixed Lens | 2.8mm Fixed Lens |
| Digital WDR | Digital WDR |
| 0.01 min lux | 0.01 min lux |
| IP66 + IK10 | IP67 + IK10 |
| White housing | White housing |
| 4-in-1 TVI/AHD/CVI/CVBS | 4-in-1 TVI/AHD/CVI/CVBS via switch |

ACCESSORIES ▼



HD-TVI Fixed Turret



| A | B | C |
|-------------------------|--|--|
| GS-T627-F28 | GS-T757-F28 GS-T757-F36 | GS-T687-F28 GS-T687-F36 |
| 2MP (1920*1080 @ 30fps) | 5MP (2560*1944 @ 20fps) | 8MP (3840*2160 @ 15fps) |
| 2.8mm Fixed Lens | 2.8mm or 3.6mm Fixed Lens | 2.8mm or 3.6mm Fixed Lens |
| Digital WDR | Digital WDR | Digital WDR, IR up to 60m |
| 0.01 min lux | 0.008 min lux, Starlight | 0.01 min lux |
| IP66 | IP67 | IP67 |
| White housing | White or grey housing | White or grey housing |
| TVI only | 4-in-1 TVI/AHD/CVI/CVBS via switch | 4-in-1 TVI/AHD/CVI/CVBS via switch |

ACCESSORIES ▼



4-in-1 4-in-1 TVI AHD CVI CVBS

120DB WDR

STARLIGHT ENHANCED

Ultra 255 HIGH RESOLUTION

IP67 WATER RESIST

HD-TVI Varifocal Dome



| GS-T656-VWZ | GS-T686-VWZ |
|---|---|
| 5MP (2560*1944 @ 20fps) | 8MP (3840*2160 @ 15fps) |
| 2.7mm - 13.5mm Motorized Varifocal Lens | 2.7mm - 13.5mm Motorized Varifocal Lens |
| Digital WDR, IR up to 40m | Digital WDR, IR up to 60m |
| 0.01 min lux | 0.01 min lux |
| IP67, Dual AC 24V / DC 12V power | IP67, Dual AC 24V / DC 12V power |
| White housing | White housing |
| 4-in-1 TVI/AHD/CVI/CVBS via switch | 4-in-1 TVI/AHD/CVI/CVBS via switch |

ACCESSORIES



DS-1273ZJ-140



DS-1280ZJ-DM45

HD-TVI Varifocal Turret



A



B

| A | B |
|---|---|
| GS-T657-VWZ | GS-T687-VWZ |
| 5MP (2560*1944 @ 20fps) | 8MP (3840*2160 @ 15fps) |
| 2.7mm - 13.5mm Motorized Varifocal Lens | 2.7mm - 13.5mm Motorized Varifocal Lens |
| Digital WDR, IR up to 40m | Digital WDR, IR up to 60m |
| 0.01 min lux | 0.01 min lux |
| IP67 | IP67 |
| White or grey housing | White housing |
| 4-in-1 TVI/AHD/CVI/CVBS via switch | 4-in-1 TVI/AHD/CVI/CVBS via switch |

ACCESSORIES



GS-BK-JB30ZJ



DS-1273ZJ-130-TRL

HD-TVI ColorVu Camera



A



B

| A | B |
|------------------------------------|------------------------------------|
| GS-TC348-FD/F3.6 | GS-TC346-FD/F2.8 |
| 2MP (1920*1080 @ 30fps) | 5MP (2560*1944 @ 20fps) |
| 3.6mm Fixed Lens | 2.8mm Fixed Lens |
| True WDR 130dB, Starlight | True WDR 130dB, Starlight |
| 0.0005 min lux | 0.0005 min lux |
| IP67, White Light LEDs | IP67, White Light LEDs |
| White housing | White housing |
| 4-in-1 TVI/AHD/CVI/CVBS via switch | 4-in-1 TVI/AHD/CVI/CVBS via switch |



GS-TC346-FD



DS-1275ZJ



GS-BK-JB30ZJ






DS-1273ZJ-130-TRL

ACCESSORIES






SWITCHES





| Regular / Switches | | |
|---|-------------------|--|
| | Model | Description |
|  | BDC-S1508 | <ul style="list-style-type: none"> • 8 Ports, 10/100/1000Mbps • 16G Switching Capacity • Full Metal Case, Desktop Mounted |
|  | BDC-S1516 | <ul style="list-style-type: none"> • 8 Ports, 10/100/1000Mbps • 16G Switching Capacity • Full Metal Case, Rack Mounted |
|  | BDC-S1524C | <ul style="list-style-type: none"> • 24 Ports, 10/100/1000Mbps • 2 SFP Gigabit Uplink • 16G Switching Capacity • Full Metal Case, Rack Mounted |

| Unmanaged PoE Switches | | |
|---|--------------------------|---|
| | Model | Description |
|  | BDC-S1006-4P-65 | <ul style="list-style-type: none"> • 4 PoE+ Ports, 10/100Mbps • 2 Uplink Ports, 10/100Mbps • 65W Total PoE Capacity • 6KV Surge Protection • Full Metal Case, Desktop Mounted |
|  | BDC-S1010-8P-120 | <ul style="list-style-type: none"> • 8 PoE+ Ports, 10/100Mbps • 2 Uplink Ports, 10/100Mbps • 120W Total PoE Capacity • 6KV Surge Protection • Full Metal Case, Desktop Mounted |
|  | BDC-S1510-8P-150 | <ul style="list-style-type: none"> • 8 PoE+ Ports, 10/100/1000Mbps • 2 Uplink Ports, 10/100/1000Mbps • 150W Total PoE Capacity • 6KV Surge Protection • Full Metal Case, Desktop Mounted or Rack Mounted |
|  | BDC-S1218-16P-330 | <ul style="list-style-type: none"> • 16 PoE+ Ports, 10/100Mbps • 2 Combo Uplink Ports, 10/100/1000Mbps • 330W Total PoE Capacity • 6KV Surge Protection • Full Metal Case, Rack Mounted |
|  | BDC-S1518-16P-330 | <ul style="list-style-type: none"> • 16 PoE+ Ports, 10/100/1000Mbps • 2 SFP Uplink Ports, 10/100/1000Mbps • 330W Total PoE Capacity • 6KV Surge Protection • Full Metal Case, Rack Mounted |

Unmanaged PoE Switches

| | Model | Description |
|---|--------------------------|---|
|  | BDC-S1226-24P-330 | <ul style="list-style-type: none"> • 24 PoE+ Ports, 10/100Mbps • 2 Combo Uplink Ports, 10/100/1000Mbps • 330W Total PoE Capacity • 6KV Surge Protection • Full Metal Case, Rack Mounted |
|  | BDC-S1526-24P-400 | <ul style="list-style-type: none"> • 24 PoE+ Ports, 10/100/1000Mbps • 2 SFP Uplink Ports, 10/100/1000Mbps • 400W Total PoE Capacity • 6KV Surge Protection • Full Metal Case, Rack Mounted |
|  | BDC-GSFP-TX-B | <ul style="list-style-type: none"> • SFP to RJ45 Connector • Up to 1.25Gb/s Bi-Directional Link Speed • Compact Metal Assembly • Used on S1518 and S1526 for Uplink to RJ45 |

Manageable PoE Switches

| | Model | Description |
|---|--------------------|---|
|  | BDC-S2510PB | <ul style="list-style-type: none"> • Layer 2+ Fully Managable Switch • 8 PoE+ Ports, 10/100/1000Mbps • 2 SFP Uplink Ports, 100/1000Mbps • Console, Telnet, SSH v1/2, HTTP, HTTPS Management • Full Metal Case, Desktop Mounted |
|  | BDC-S2518PB | <ul style="list-style-type: none"> • Layer 2+ Fully Managable Switch • 16 PoE+ Ports, 10/100/1000Mbps • 2 SFP Uplink Ports, 100/1000Mbps • Console, Telnet, SSH v1/2, HTTP, HTTPS Management • Full Metal Case, Rack Mounted |
|  | BDC-S2528PB | <ul style="list-style-type: none"> • Layer 2+ Fully Managable Switch • 24 PoE+ Ports, 10/100/1000Mbps • 4 SFP Uplink Ports, 100/1000Mbps • Console, Telnet, SSH v1/2, HTTP, HTTPS Management • Full Metal Case, Rack Mounted |
|  | BDC-S2952P | <ul style="list-style-type: none"> • Layer 2+ Fully Managable Switch • 48 PoE+ Ports, 10/100/1000Mbps • 4 SFP Uplink Ports, 10GE • Console, Telnet, SSH v1/2, HTTP, HTTPS Management • Full Metal Case, Rack Mounted |






WIRELESS AP

| | Model | Description |
|---|------------------------------|--|
|  | BDCOM WAP2100-T22D-W2 | <ul style="list-style-type: none"> • Ceiling-Mounted Intelligent Wireless AP • 1 Gigabit PoE WAN, 2 Gigabit LAN • Dual Frequency 2.4GHz/5.8GHz • 802.11ac Wi-Fi Standard • 1167Mbps Transmission Speed • Up to 200 user access, 32 SSIDs |







ACCESSORIES





| PoE Repeater / Injector / Splitter | | |
|---|----------------------------|---|
| | Model | Description |
|  | GS-POE-INJECTOR-24V | 1 CH PoE injector, 10/100Mbps up to 328ft, 24V / 12W |
|  | BDC-PSE-1000 | 1 CH PoE+ injector, 10/100/1000Mbps up to 328ft, 48V / 30W |
|  | GS-POE-P30 | PoE splitter, 1 input/2 output, extend up to 100m, IEEE802.3af/at |
|  | FS-IP04 | Passive PoE repeater, extend additional 100m, can be daisy chained |
|  | FS-IP04X | Passive PoE+ repeater, extend additional 100m, can be daisy chained |
|  | TL-PA4010-KIT | AV600 Nano Powerline Adapter Starter Kit up to 600Mbps |

| Network Cable | | |
|---|----------------------------|-----------------------------------|
| | Model | Description |
|  | GS-CAB-C5-FT4-1000W | Cat5e 1000FT Cable FT4 white |
|  | GS-CAB-C5-FT6-1000W | Cat5e 1000FT Cable FT6 white |
|  | GS-CAB-C6-FT4-1000W | Cat6 1000FT Cable FT4 white |
|  | GS-CAB-C6-FT6-1000W | Cat6 1000FT Cable FT6 white |
|  | GS-CAB-C5-OUT-DOOR | Cat5e 1000FT Outdoor Burial Cable |
|  | GS-CAB-C6-OUT-DOOR | Cat6 1000FT Outdoor Burial Cable |

Other Cable

| Model | Description |
|--|--|
|  GS-CAB-ALARM-FT4 | High Quality FT-4 22 AWG X4 Solid Pure Copper Cable 1000ft per box Marked in every 2 feet CSA, or cUL listed CMR FT4 Rated Colour available: ○ ● ● ● ● ● |
|  GS-CAB-ALARM-FT6 | High Quality FT-6 22 AWG X4 Solid Pure Copper Cable 1000ft per box Marked in every 2 feet CSA, or cUL listed CMR FT4 Rated Colour available: ○ ● ● ● ● ● |
|  GS-CAB-POWER-2/18 | High Quality 18 AWG X2 Pure Copper Cable 1000ft per box Marked in every 2 feet CSA, or cUL listed FT4 Rated |
|  GS-CAB-RG-59SIAM-500 | 95% Braiding Shield Solid Pure Copper, 18AWG X2 Standard Power Cable 500ft per box Marked in every 2 feet CSA, or cUL listed FT4 Rated Colour available: ○ ● |





RJ45 Connectors

| Model | Description |
|--|--------------------------------------|
|  GS-ADP-C5-RJ45 | RJ45 connector for Cat5e |
|  GS-ADP-C5-RJ45-P | RJ45 passthrough connector for Cat5e |
|  GS-ADP-C6-RJ45 | RJ45 connector for Cat6 |
|  GS-ADP-C6-RJ45-P | RJ45 passthrough connector for Cat6 |






HDMI Connectors

| Model | Description |
|---|--|
|  GS-CAB-HDMI-6FT-4K | HDMI Cable 1080P & 4k, 6FT |
|  GS-CAB-HDMI-10FT-4K | HDMI Cable 1080P & 4k, 10FT |
|  GS-CAB-HDMI-25FT-4K | HDMI Cable 1080P & 4k, 25FT |
|  GS-ACC-HDMI SPLITTER-1TO4-4K | HDMI splitter 1 to 4, up to 3840*2160/30HZ, power adapter included |
|  GS-ACC-HDMI EXTENDER-40M | HDMI Signal Extender 1080p over Cat5e Cat6 Cable - Max Range 40m |
|  GS-ADP-TV HDMI-1TO4-4K | HDMI splitter 1 to 4, up to 3840*2160/30HZ, power adapter included |







VGA Connectors



| Model | Description |
|--|--|
|  GS-CAB-VGA-10FT | VGA Cable M-M, 10FT |
|  GS-CAB-VGA-25FT | VGA Cable M-M, 25FT |
|  GS-CAB-VGA-50FT | VGA Cable M-M, 50FT |
|  GS-ACC-VGA EXTENDER-300M | 300M VGA Extender Set (Transmitter & Receiver) with Audio Extender Function via single CAT5/CAT5e/CAT6 Cabling |

| BNC Connectors | | |
|---|---|--|
| Model | Description | |
|  GS-ADP-RG59-TWIST | BNC connector RG59 twist on | |
|  GS-ADP-RG59-CMPR | BNC connector RG59 compression | |
|  GS-ADP-RG6-CMPR | BNC connector RG6 compression | |
|  GS-ADP-BNC-FF | BNC female to female adapter | |
|  GS-ADP-BNC-T-1M2F | BNC T sharp connector, Male to 2 Female | |
|  GS-ADP-BNC-RCA-MF | BNC female to RCA Male adapter | |
|  GS-ADP-BNC-RCA-FM | BNC female to RCA Male adapter | |

| Power Adapters | | |
|--|--|--|
| Model | Description | |
|  GS-PWR-1A | Power adapter 12V DC / 1A | |
|  GS-PWR-2.5A | Power adapter 12V DC / 2.5A | |
|  GS-PWR-5A | Power adapter 12V DC / 5A | |
|  GS-PWR-4CH5A | Power adapter 12V DC / 5A over 4 channels, screw in type | |
|  GS-PWR-24V | Power adapter 24V AC / 2A | |

| Power Supplies | | |
|--|-----------------------------|--|
| Model | Description | |
|  GS-PWR-12DC9 | DC12V 9xOutputs @ 1.6 amps | |
|  GS-PWR-12DC18 | DC12V 18xOutputs @ 1.6 amps | |
|  GS-PWR-24AC9 | AC24V 9xOutputs @ 1.6 amps | |
|  GW-PWR-24AC18 | AC24V 18xOutputs @ 1.6 amps | |

| DC Connectors | | |
|--|---|--|
| Model | Description | |
|  GS-PWR-ACC-24VTO12V | 24V AC to 12V DC Converter Input: 20-28V AC, Output: 12V DC, 1.5A | |
|  GS-PWR-ACC-DCM | Screw-On type DC power male terminal | |
|  GS-PWR-ACC-DCF | Screw-On type DC power female terminal | |
|  GS-PWR-ACC-SP1TO4 | DC power splitter 1 to 4 | |
|  GS-PWR-ACC-PTM | Pigtail DC Power cable male | |
|  GS-PWR-ACC-PTF | Pigtail DC Power cable Female | |

| Tester | | |
|---|---|--|
| Model | Description | |
|  GS-IPTESTER-X4 | Multi-function tester for HD-Analog and ONVIF cameras, up to 4k resolutions, cable test and tracing. 4" touch screen | |
|  GS-IPTESTER-X9 | Multi-function tester for HD-Analog and ONVIF cameras, up to 4k resolutions, cable test and tracing. 8" retina touch screen | |

ACCESS CONTROL SYSTEM



| | |
|--|--|
| Mobile Based Access <ul style="list-style-type: none"> • Open Door Using User's Mobile • Future Proof, Convenience | User Friendly Operation and Installation <ul style="list-style-type: none"> • Standalone and Network Operation • Easy Mounting on a Back Plate • Leverage Existing Network Infrastructure |
| Secured Communication <ul style="list-style-type: none"> • Difficult to Breach • Security | Choose Credentials as Per Convenience <ul style="list-style-type: none"> • Fingerprint, Proximity and Smart Cards • Proximity: EM Prox And HID Prox • Smart: MIFARE® and HID iCLASS • BLE |
| Work with Third Party Access Panel <ul style="list-style-type: none"> • Supports Universal Wiegand Interface • Interoperability | Convenient Communication Options <ul style="list-style-type: none"> • Wi-Fi • Ethernet • RS-232 and RS-485 • Wiegand • Bluetooth |
| Tamper Detection <ul style="list-style-type: none"> • Sense and Give Alarm • Higher Security | |

GS-MA-PANEL200S



COSEC PANEL LITE

COSEC PANEL LITE manages multiple controllers and acts as a bridge between the controllers and the central COSEC server. They are responsible for synchronizing all door controllers and implementing advanced access control features.

- Ethernet and RS-485
- USB for Wi-Fi, 3G/4G/LTE and Data Transfer
- Auxiliary Input and Output Ports
- Advance Access Control Features
- Trap Messages-Door, Alarm & System Events
- Elevator Access Control

| COSEC PANEL LITE | | |
|------------------|---|--|
| USE | STANDALONE MODE | NETWORK MODE |
| For | SMB, SME and SOHO | Enterprises and SME |
| Location | Single Location | Multiple Locations with COSEC Server |
| Software | Built-in with COSEC PANEL LITE | Web based with COSEC Server |
| Capacity | Connect up to 255 Doors with COSEC PANEL LITE | Connect up to 65,000 Doors with COSEC Server |
| Users | 25,000 Users with COSEC PANEL LITE | One Million Users with COSEC Server |

GS-MA-ARC DC200S



Matrix COSEC ARC DC200 is an intelligent controller with Wi-Fi and PoE+ for Access Control applications. This smart controller can control two doors over Wiegand/RS485/RS-232 without need of external power supply.

- Two Readers and Two Exit Switches
- Wi-Fi, PoE+, BLE and Wiegand
- Third party Wiegand Readers
- SSL Enabled
- 50,000 Users and 500,000 Events
- Wall Mount and Din-Rail Mounting
- BIS, CE, FCC, UL Certified

ACCESS CONTROL READERS

GS-MA-PATH RDCM



- Card Reader with Mifare Module
- User Friendly Operation and Installations
- Convenient Communication Options such as ethernet, RS-232 and RS-485 – fetch power from device
- Bluetooth over Mobile
- Work with Third Party Access Panel

GS-MA-PATH DCCM



- Standalone Card Reader with Mifare Module
- User Friendly Operation and Installation such as ethernet, RS-232 and RS-485 – fetch power from device
- Built with advanced features like Wi-Fi & Bluetooth connectivity, IP65, PoE
- Work with Third Party Access Panel

GS-MA-PATH RDFM



- Fingerprint Reader with Mifare Module
- User Friendly Operation and Installation
- Convenient Communication Option such as ethernet, RS-232 and RS-485 – fetch power from device
- Work with Third Party Access Panel

GS-MA-PATH DCFM



- Standalone Card Reader with Mifare Module
- User Friendly Operation and Installation
- Convenient Communication Option such as ethernet, RS-232 and RS-485 – fetch power from device
- Built with advanced features like Wi-Fi & Bluetooth connectivity, IP65, PoE
- Work with Third Party Access Panel

ACCESS CONTROL ACCESSORIES



GS-CARD-MIFARE

- 13.56 MHz Frequency
- Up to 3.94 Read Range (100 mm)
- Triple Security Accreditation (ISO/IEC DIS9798-2)



GS-FOB-MIFARE


- ABS and PVC wrap, ultrasonic welding
- Compact and durable, easily fits on key chains
- Read-write distance: 5 - 10 cm
- 13.56 MHz working frequency
- Dimension: 41×32×3.5 mm
- IP67

CLOUD-BASED ACCESS CONTROL

- Access from Anywhere, Anytime
- Real-time Events and Updates
- Unlimited Attendance and Leave Policies
- Multi-Level Data Encryption and Protection
- Quick Deployment and Setup
- No Software Installation
- Add on Modules like Time-Attendance, Visitor Management, Access Control, Cafeteria Management, Job Processing and Costing, Contract Workers Management, Employee Self-service are supported in Cloud.

For More Information on products and to find support Documents For Matrix Access Control, Please Visit Our Website.

ACCESS POINTS

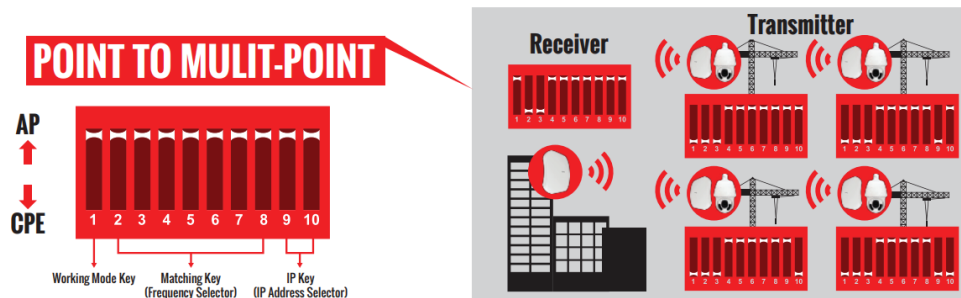

| DIP-3226-POE | DIP3526-POE |
|--|--|
| Wireless Access Point 2.4 GHz (with POE) | Wireless Access Point 5.8 GHz (with POE) |
| POE POWER/ FOR CCTV WIFI TRANSMISSION | POE POWER/ FOR CCTV WIFI TRANSMISSION |
| IEEE802.11b/g/n/3u 100Mbps LAN*2 | IEEE802.11b/g/n/3u 100Mbps LAN*2 |
| Chipset: AR9344 600MHz | Chipset: AR9344 600MHz |
| Transmission Range: 3KM Frequency: 2.4 GHz | Transmission Range: 3KM Frequency: 5.8 GHz |
| Wireless Speed: 300Mbps | Wireless Speed: 300Mbps |
| Transmitting Power: 27 DBM | Transmitting Power: 27 DBM |
| Antenna Gain: 16 DB | Antenna Gain: 16 DB |
| Antenna Direction: Vertical & Horizon | Antenna Direction: Vertical & Horizon |
| Voltage: 24 V | Voltage: 24 V |
| Ampere: 1A | Ampere: 1A |



| POE29-RX548 |
|-------------------------------------|
| 4-port Outdoor POE switch |
| 4*10/100M POE 1*10/100M UPLINK RJ45 |
| IEEE802.3, IEEE 802.3u, 802.3af |
| IEEE802.3x |
| Backplane Bandwidth: 1000Mbps |
| MAC: 4K |
| UL external power supply (Gospower) |
| Water Proof IP 65 |
| Outdoor switch |



Outdoor Mini PTZ

Alert before things happen

Benefits

Compared with traditional video surveillance cameras, the active deterrence outdoor mini PTZ can stop the illegal events immediately to prevent serious consequences. Once an intruder is detected, the PTZ triggers a strobe light and an audio alert to warn before the intruder attempts to enter the boundary.



Active Deterrence

The strobe light and audio alarm will be triggered by the intruders. The volume of the audio alarm and the brightness of the strobe light can be adjusted according to the environment.



Human Body Detection

Detect human body only. Alarm will not be triggered by small animals or other irrelevant objects.

OUR CORE VALUES



www.gsglobalsecurity.com
Contact: (905)367-7177
Email: info@gsglobalsecurity.com