

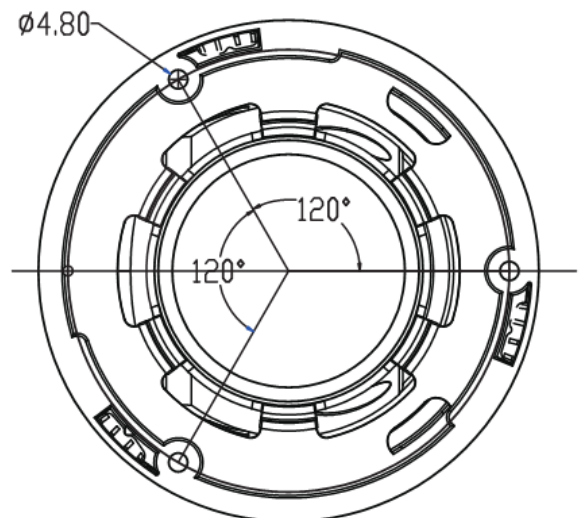


**Model: P3615C-28**

**5MP Dual light source Turret IP camera with two-way audio and SD card slot**

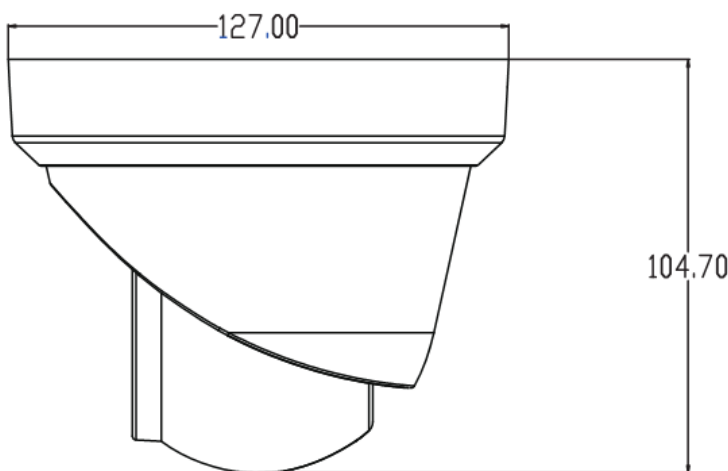

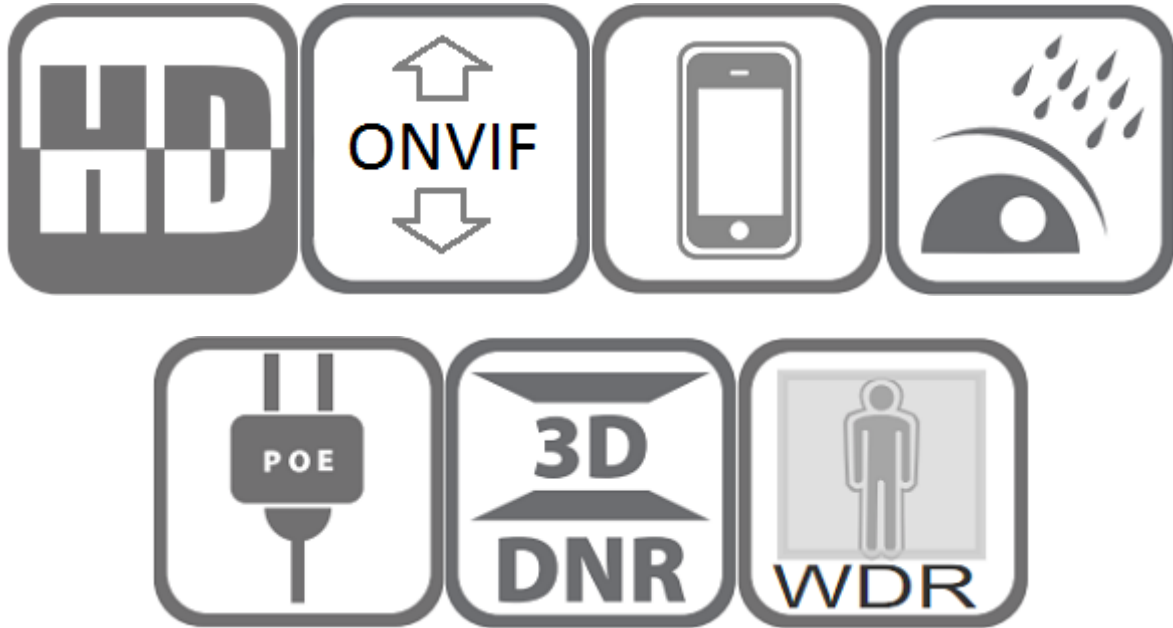

**Features:**

- ❖ 1/2.8" Sony CMOS sensor
- ❖ 5MP resolution 3072 x 2048P
- ❖ Low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ **Two way audio, Built in Microphone and Speaker ,with SD card slot(support up to 256GB SD card)**
- ❖ **Support audio alarm to warn intruders off**
- ❖ **Support warm light on when detect human body and vehicle**
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP67
- ❖ 2PCS dual Lights,IR distance:25-30M,warm light distance:25-30M
- ❖ HD 2.8mm F1.6 lens
- ❖ With reset button

**Technical Specifications:**

<b>Model</b>	<b>P3615C-28</b>
<b>Camera</b>	

Image Sensor	1/2.8" SONY IMX335 CMOS
Effective Pixels	3072 (H) × 2048 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
BLC	Support
DNR	2D/3D DNR
Other	<b>Enter Area, Leave Area, People Counting, Line Cross, Human body and Vehicle detection</b> , Motion Detection, Privacy Mask, Mirror, flip
<b>Encode</b>	
Embedded Solution	SSC30KQ
Video Standard	H.264/H.265
Video Resolution	Main Stream:25fps@6MP(3072x2048)/5MP(2592x1944)/4MP/3MP/1080P/720P,etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 10Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
OSD Overlay	Title and Time overlay
<b>LedS</b>	
Leds	2PCS dual Lights
IR distance	25-30M
Warm Light Distance	25-30 M
<b>Lens</b>	
Focal length	HD 2.8mm F1.6 lens
<b>Functions</b>	
<b>Two way audio, Built in Microphone and Speaker ,with SD card slot(support up to 256GB SD card)</b>	
<b>Network Services</b>	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox,Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
<b>General</b>	
Network Port	1-RJ45, 100Mbps
Power Supply	POE ,12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-30℃-(+60)℃, 10%-90%RH